


Aries™ TWD

Integral non-pressure-compensated high clogging resistance dripper, for multi-seasonal semi-permanent crops on surface or sub surface.

→ 12125 - 12150 - 16125 - 16150 - 22125
22135 - 22150

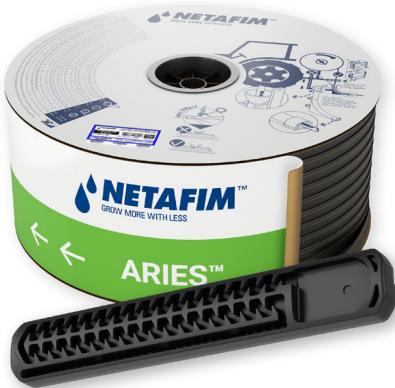

High clogging
resistance



Wide filtration
area



Wide water
passages

/ Benefits & Features

- High clogging resistance
- Even with challenging water quality, with self-cleaning labyrinth that flushes debris throughout operation.
- Wide filtration area
- Ensures optimal performance even under harsh water conditions, preventing the entrance of sediments into the drippers.
- Wide water passages
- TurbuNext™ labyrinth ensures wide water passages, large deep and wide cross-section that improves clogging resistance.

/ Specifications

- Maximum operating pressure according to driplines wall thickness and diameter. See table below.
- Recommended filtration: depending on dripper flow rate. Filtration method selected based on the kind and concentration of dirt particles contained in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydrocyclone should be installed before the main filter. Where sand/silt/clay solids exceed 100 ppm, pre treatment it should be applied following Netafim™ expert instructions.
- TurbuNext™ labyrinth with superior performance.
- Weldable into thin wall driplines (0.31, 0.34, 0.38 mm).
- Injected dripper, very low CV.
- High UV resistant. Resistant to standard nutrients used in agriculture.
- Compliance ISO 9261 international standards.

→ Drippers technical data

12125, 12150, 16125, 16150, 22125, 22135, 22150 - 0.31, 0.34, 0.38 mm wall thickness driplines

Flow rate* (l/h)	Max. working pressure (bar)**	Water passages dimensions width-depth-length (mm)	Filtration area (mm ²)	Constant K	Exponent X	Recommended filtration (micron)/(mesh)
0.50	1.2 up to 3.0	0.47 x 0.53 x 65	36	0.173	0.46	130/120
0.80		0.54 x 0.69 x 65	43	0.277	0.46	130/120
0.95		0.60 x 0.74 x 65	49	0.329	0.46	200/80
1.35		0.71 x 0.85 x 65	53	0.468	0.46	200/80
1.85		0.76 x 1.03 x 65	54	0.641	0.46	200/80
2.80		0.90 x 1.20 x 65	54	0.971	0.46	200/80
3.80		0.94 x 1.28 x 33	54	1.318	0.46	200/80
8.00		1.52 x 1.28 x 28	50	2.773	0.46	200/80

*Flow rate at 1.0 bar pressure **According to driplines diameter and wall thickness

→ Driplines technical data

Model	Inside diameter (mm)	Wall thickness (mm)	Outside diameter (mm)	Max. working pressure (bar)	Max. flushing pressure (bar)	KD
12125	11.80	0.31	12.42	2.5	2.9	0.40
12150	11.80	0.38	12.56	3.0	3.5	0.40
16125	16.20	0.31	16.82	1.8	2.1	0.30
16150	16.20	0.38	16.96	2.2	2.5	0.30
22125	22.20	0.31	22.82	1.2	1.4	0.06
22135	22.20	0.34	22.88	1.5	1.9	0.06
22150	22.20	0.38	22.96	1.8	2.1	0.06

→ Driplines package data (on carton coil)

Model	Wall thickness (mm)	Distance between drippers (m)	Coil length (m)	Average* coil weight (kg)	Coils per pallet (units)	Coils in a 40 feet container (units)	Total in a 40 feet container (m)
12125	0.31	0.15	1300	14.5	16	640	832000
		0.20 to 0.25	1300	14.5			832000
		0.30 to 1.00	1350	15.1			864000
12150	0.38	0.15	1000	19.1	16	640	640000
		0.20 to 0.25	1100	19.3			704000
		0.30 to 1.00	1200	19.8			768000
16125	0.31	0.15 to 0.25	1000	18.7	16	640	640000
		0.30 to 1.00	1100	19.5			704000
16150	0.38	0.15 to 0.25	900	20.1	16	640	576000
		0.30 to 1.00	1000	21.4			640000
22125	0.31	0.15 to 0.25	900	21.9	16	640	576000
		0.30 to 1.00	1000	23.4			640000
22135	0.34	0.15 to 0.25	800	18.2	16	640	512000
		0.30 to 1.00	900	20.5			576000
22150	0.38	0.15 to 0.25	700	20.6	16	640	448000
		0.30 to 1.00	800	22.7			512000

* Calculated weight average. For further details see "Average Coil Weight Disclaimer".

/ Drippers flow rate vs working pressure

In order to calculate the right flow rate of each dripper, under different working pressures, we use the following formula:

$$Q = K * P^X$$

Where:

Q = Dripper flow rate (liters/hour)

K = Constant (each dripper has his singular constant and must be defined by the dripper producer)

P = Real working pressure (meter)

X = Exponent (each dripper has its singular exponent and must be declared and defined by the dripper producer)

*ISO 9261 require from the manufacturer to declare the constant K and dripper exponent

Non-pressure-compensated drippers provide flow adequate to the pressure it is exposed to, according to the formula presented above. In order to simplify the calculations and understandings of the linkage between the flow and the pressure, a table with the flow rates at different working pressures is presented here for each of the drippers presented in this document.

Flow rate (l/h) vs pressure (bar)

12125/12250/16125/16150/22125/22135/22150 - 0.31, 0.34 and 0.38 mm wall thickness driplines

Flow rate* (l/h)	Pressure (bar)							
	0.2	0.4	0.6	0.8	1.0	1.5	2.0	2.25
0.50	0.24	0.33	0.39	0.45	0.50	0.60	0.69	0.76
0.80	0.38	0.52	0.63	0.72	0.80	0.96	1.10	1.15
0.95	0.45	0.62	0.75	0.86	0.95	1.14	1.31	1.36
1.35	0.64	0.89	1.07	1.22	1.35	1.63	1.86	1.94
1.85	0.88	1.21	1.46	1.67	1.85	2.23	2.54	2.66
2.80	1.34	1.84	2.21	2.53	2.80	3.37	3.85	4.02
3.80	1.81	2.49	3.01	3.43	3.80	4.58	5.23	5.46
8.00	3.81	5.25	6.32	7.22	8.00	9.64	11.00	12.19

*Nominal flow rate at 1.0 bar pressure

/ Max. lateral length

Flow Variation (FV) expresses the flow variation between the dripper "sensing" the highest pressure and the one "sensing" the lowest pressure in an irrigation block (zone).

These drippers will not always be the first and last drippers on the dripline.

$$FV \% = (Q_{\max} - Q_{\min}) / Q_{\max} * 100$$

*International standards define 10% flow variation to be considered as uniform irrigation.

In order to calculate the maximum run lengths that can be planned for specific dripline (considering all the hydraulic factors influencing the flow within the same dripline), we use a calculation software that was developed by Netafim™ based on Darcy-Waisbach formulas + years of design experience and cooperation with academic institutes.

All the tables presented in this document are for initial reference only; the exact run length of the driplines is obtained from design software that considers various hydraulic factors in the entire system.

There might be small variance between the different software's in the market due to the calculation method and assumptions each software is using. For an initial estimate of the dripline length, the data that is presented in this document (within the tables shown) is sufficiently accurate.

Non-pressure-compensated drippers of Netafim™ will provide different flow according to the real working pressure, therefore, the influencing factors will be: the pressure that each dripper in the dripline is exposed to, and the allowed flow variation the dripline is designed to, which in most cases is defined as 10% difference in flow, according to the international standards, and / or any other limitation that the customer / planner will prefer to design while considering the crop needs and area topography.

The following tables are only displayed at one inlet pressure for each dripline, since in non-pressure-compensated drippers the flow varies according to the pressure. There might be differences in run lengths with different inlet pressures; however for an initial estimate of the dripline length, the data that is presented in this document (within the tables shown) is sufficiently accurate.

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 0.50 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)									
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	72	90	103	113	119	125	130	133	136	
	1%	81	106	126	143	158	170	181	191	199	
Flat terrain	0	91	124	153	180	205	228	250	272	292	
	-1%	98	138	175	210	242	274	305	335	364	
Downhill	-2%	105	150	192	232	271	308	344	379	413	

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 0.80 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)									
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	58	74	87	97	105	112	118	122	126	
	1%	63	83	101	115	128	140	150	160	168	
Flat terrain	0	68	93	116	136	155	172	190	204	220	
	-1%	72	101	128	153	177	201	223	246	268	
Downhill	-2%	76	110	141	172	202	232	262	291	320	

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 0.95 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)									
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	53	68	80	91	98	105	111	116	120	
	1%	57	76	92	106	118	128	138	147	155	
Flat terrain	0	61	83	104	122	139	154	170	184	198	
	-1%	64	89	113	135	157	177	197	216	235	
Downhill	-2%	67	96	124	150	176	202	227	252	277	

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 1.35 l/h • Inlet pressure: 1.5 Bar

		Distance between drippers (meter)									
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	43	57	68	77	85	92	97	102	106	
	1%	46	62	75	87	97	106	115	122	130	
Flat terrain	0	49	66	82	97	111	124	135	147	158	
	-1%	50	70	88	106	122	137	153	167	181	
Downhill	-2%	53	74	95	115	134	153	171	189	207	

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 1.85 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)									
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	36	48	57	66	73	79	85	90	94	
	1%	38	51	62	72	81	90	98	104	111	
Flat terrain	0	40	54	67	80	91	101	111	121	130	
	-1%	41	57	71	85	98	110	122	133	145	
Downhill	-2%	42	59	76	91	106	120	134	149	162	

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 2.80 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)								
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
Uphill	2%	28	38	46	53	59	64	69	74	78
	1%	29	40	49	57	64	71	77	83	88
Flat terrain	0	30	42	52	61	69	77	85	92	99
	-1%	31	43	54	64	74	83	91	100	108
Downhill	-2%	32	44	56	68	78	89	98	108	118

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 3.80 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)								
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
Uphill	2%	24	32	38	45	50	55	59	64	68
	1%	24	33	40	48	53	60	65	70	75
Flat terrain	0	25	34	42	50	57	64	70	77	82
	-1%	25	35	44	52	60	67	74	81	88
Downhill	-2%	26	36	46	55	63	71	79	87	94

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 12125/12150 • ID 11.8 mm • KD 0.40 • Flow rate 8.00 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)								
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
Uphill	2%	15	20	24	29	32	36	38	41	44
	1%	15	20	25	30	34	37	41	44	47
Flat terrain	0	15	21	26	31	35	39	42	47	50
	-1%	15	21	26	32	36	41	45	49	53
Downhill	-2%	16	22	27	33	37	42	46	50	55

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 0.50 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)								
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
Uphill	2%	103	121	132	138	142	145	147	149	150
	1%	127	161	187	206	221	234	243	252	258
Flat terrain	0	154	212	262	309	352	392	430	467	502
	-1%	176	251	321	388	452	514	574	634	691
Downhill	-2%	192	280	362	243	224	201	193	187	185

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 0.80 l/h • Inlet pressure 1.5 Bar

		Distance between drippers (meter)								
		Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
Uphill	2%	87	107	120	130	136	141	145	147	150
	1%	101	131	155	175	191	204	216	226	235
Flat terrain	0	116	159	198	233	265	295	325	352	378
	-1%	128	183	235	285	334	382	430	478	525
Downhill	-2%	141	209	276	344	412	481	198	181	173

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 0.95 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	81	100	114	124	130	136	140	143	146
	1%	92	120	142	162	178	190	202	212	222
Flat terrain	0	104	143	177	209	237	265	290	316	339
	-1%	113	161	206	250	292	334	374	415	455
Downhill	-2%	124	182	239	296	353	412	470	210	187

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 1.35 l/h • Inlet pressure: 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	68	86	100	110	118	125	129	133	137
	1%	75	99	119	136	150	163	174	185	193
Flat terrain	0	83	113	141	166	190	211	232	251	271
	-1%	88	125	159	192	224	254	285	314	343
Downhill	-2%	95	138	180	221	262	302	343	384	425

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • 16.2 mm • KD 0.30 • Flow rate 1.85 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	57	74	87	97	106	112	118	122	127
	1%	62	83	100	115	128	140	151	160	169
Flat terrain	0	67	93	115	136	155	173	190	205	221
	-1%	71	100	127	153	178	201	224	247	269
Downhill	-2%	75	109	140	172	202	232	262	293	322

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 2.80 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	46	60	71	81	89	96	102	107	111
	1%	48	65	79	92	103	113	122	131	139
Flat terrain	0	51	71	88	104	119	133	146	158	170
	-1%	53	75	95	114	131	148	166	182	197
Downhill	-2%	56	80	103	125	146	167	187	208	228

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 3.80 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	38	51	61	70	77	83	90	95	99
	1%	40	54	67	78	87	96	104	112	118
Flat terrain	0	42	58	73	86	97	109	120	131	140
	-1%	43	61	77	92	106	120	133	146	158
Downhill	-2%	45	64	82	99	116	132	147	163	178

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 16125/16150 • ID 16.2 mm • KD 0.30 • Flow rate 8.00 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	24	32	40	46	52	56	61	65	69
	1%	25	34	42	49	55	61	66	72	77
Flat terrain	0	26	35	44	52	59	67	73	79	85
	-1%	26	37	46	55	63	71	78	86	93
Downhill	-2%	27	38	48	57	66	75	83	91	99

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate: 0.50 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	136	145	148	150	151	153	153	153	154
	1%	203	235	255	268	277	283	287	291	294
Flat terrain	0	301	399	485	564	636	704	769	831	890
	-1%	377	526	665	795	505	449	408	390	380
Downhill	-2%	237	198	185	181	178	177	176	176	175

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate: 0.80 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	128	141	148	152	154	156	158	158	159
	1%	171	206	230	248	261	271	278	284	291
Flat terrain	0	227	301	366	425	480	531	580	627	671
	-1%	277	392	503	614	723	834	945	431	379
Downhill	-2%	333	496	177	167	162	160	158	157	156

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate: 0.95 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	122	136	144	149	152	155	156	157	158
	1%	158	193	217	235	249	260	269	276	282
Flat terrain	0	203	269	328	381	430	476	520	562	602
	-1%	243	342	437	531	623	715	809	902	996
Downhill	-2%	287	423	195	173	166	162	160	158	157

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • K 0.06 • Flow rate 1.35 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	108	125	135	142	146	149	151	154	154
	1%	133	165	189	208	223	235	246	254	262
Flat terrain	0	162	215	262	304	344	380	416	448	481
	-1%	187	260	330	398	464	530	595	661	725
Downhill	-2%	214	311	407	505	185	174	167	164	162

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate 1.85 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	95	113	124	133	138	142	146	148	150
	1%	113	142	164	183	198	211	222	231	239
Flat terrain	0	132	176	214	249	281	311	340	367	393
	-1%	149	206	259	311	361	410	458	506	554
Downhill	-2%	167	239	309	379	450	223	187	176	171

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate 2.80 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	79	97	109	118	125	130	135	139	141
	1%	90	115	134	151	165	178	188	198	207
Flat terrain	0	101	135	164	191	216	239	261	282	302
	-1%	111	152	190	227	262	295	329	362	395
Downhill	-2%	121	171	218	266	312	358	406	453	500

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate 3.80 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	68	84	97	106	114	120	125	130	133
	1%	75	97	115	130	143	155	165	174	183
Flat terrain	0	83	111	135	157	178	197	214	232	249
	-1%	90	122	152	181	208	235	260	285	310
Downhill	-2%	96	135	171	207	242	277	310	345	379

Max. lateral length (meters) at different slopes - 10% flow variation

Aries™ TWD • 22125/22135/22150 • ID 22.2 mm • KD 0.06 • Flow rate 8.00 l/h • Inlet pressure 1.5 Bar

	Distance between drippers (meter)									
	Slope	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
Uphill	2%	45	57	67	75	82	88	94	98	102
	1%	48	62	74	85	95	104	111	119	125
Flat terrain	0	51	68	82	96	108	120	131	142	152
	-1%	53	72	89	105	120	134	148	161	174
Downhill	-2%	56	76	95	113	129	146	161	176	191